

AEG

PHOTOVOLTAIC MODULE AS-M1203 (M6 CELLS)



370- 380 W_p
120 MONOCRYSTALLINE HALF-CUT CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



OPTIMIZED DESIGN
MAXIMUM EFFICIENCY

AEG solar modules with half-cut cells (M6) and 9 busbar technology are designed to maximize efficiency and plant performance. The extra-long cables allow more installation flexibility and comfort.



EXTENSIVE WARRANTIES,
EXTRA PEACE OF MIND

Thanks to their outstanding manufacturing quality, AEG High Efficiency modules (glass-backsheet) are covered by 15 years warranty on the product and 25 years warranty on performance. For extra peace of mind, product warranty can optionally be extended to 20 years.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



www.aeg-industrialsolar.de

HIGH EFFICIENCY SERIES



PRODUCT NAMECODE (PNC)


AS-M1203-H(M6)-370/375/380, silver frame
AS-M1203Z-H(M6)-370/375/380, black frame

PRODUCT SERIES & NAMECODE (PNC)	
AEG HIGH EFFICIENCY SERIES	
AS-M1203-H(M6)-370/375/380 silver frame, white backsheet	
AS-M1203Z-H(M6)-370/375/380 black frame, white backsheet	

CERTIFICATIONS	
System	ISO 9001, ISO 14001, OHSAS 18001
Product	IEC 61215-1/-2:2016 (EN: 2017)
	IEC 61730-1/-2:2016 (EN: 2018)




ELECTRICAL CHARACTERISTICS AT STC ¹²				
Nominal Power (Pmax)	[Wp]	370	375	380
Power Sorting ³	[Wp]	-0/+5	-0/+5	-0/+5
Maximum Power Voltage (Vmp)	[V]	33,98	34,28	34,51
Maximum Power Current (Imp)	[A]	10,89	10,94	11,01
Open Circuit Voltage (Voc)	[V]	40,75	41,05	41,34
Short Circuit Current (Isc)	[A]	11,35	11,42	11,49
Module Efficiency (ηm)	[%]	20,3	20,6	20,9
Maximum System Voltage	[V]	1000	1000	1000
Series Fuse Maximum Rating	[A]	20	20	20

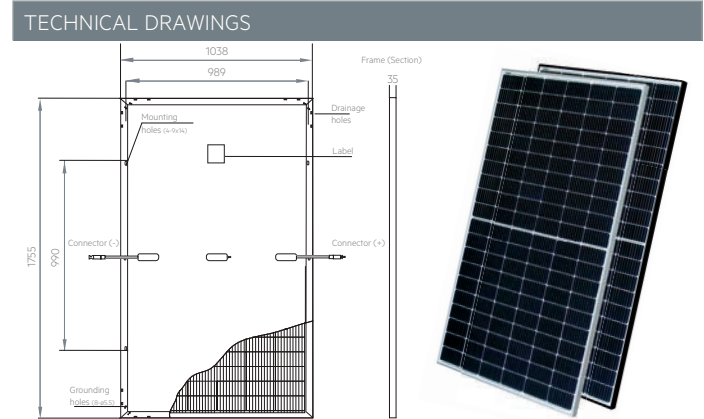

ELECTRICAL CHARACTERISTICS AT NMOT ⁴				
Maximum Power (Pmax)	[W]	275,9	279,6	283,4
Maximum Power Voltage (Vmp)	[V]	31,68	31,96	32,18
Maximum Power Current (Imp)	[A]	8,71	8,75	8,81
Open Circuit Voltage (Voc)	[V]	38,31	38,59	38,87
Short Circuit Current (Isc)	[A]	9,13	9,19	9,24

TEMPERATURE CHARACTERISTICS		
NMOT	[°C]	41±2
Pmax Temp. Coefficient (γ)	[%/°C]	-0,35
Voc Temp. Coefficient (β)	[%/°C]	-0,27
Isc Temp. Coefficient (α)	[%/°C]	0,05
Operating temperature	[°C]	-40~+85

MECHANICAL CHARACTERISTICS		
Solar cells	monocrystalline silicon, half-cut [pcs]	120
	Dimensions [mm]	M6 Half-cut [166 x 83]
Front glass	high-transparency	
	Thickness [mm] / [in]	3,2 / 0,126
Backsheet	White	
Encapsulant	EVA	
Frame	Anodized aluminum alloy	Silver or black
Junction box	Split-type	IP68
	Bypass diodes	3
UV-resistant cables	Length [mm] / [in]	1200 / 47,24
	Section [mm²]	4
Connectors	MC4	compatible
Dimensions	H x L x W [mm]	1755 x 1038 x 35
	H x L x W [in]	69,09 x 40,86 x 1,37
Weight	[kg] / [lbs]	19,4 / 42,76
Maximum load	Wind / Snow [Pa]	2400 / 5400

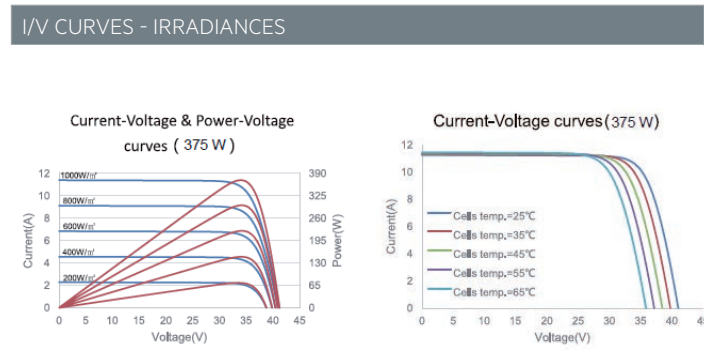

WARRANTIES		
Product warranty	[years]	15 (opt.ext. to 20)
Performance warranty (linear) ⁵	[years]	25

PACKAGING		
Packing configuration	[pcs/pallet]	31
Loading capacity	[pcs/40 ft container]	806

CONTACT US
 Solar Solutions GmbH
 Brückenstrasse 94, 60594 Frankfurt am Main, Germany
 +49 (0)69 400500810 | info@aeg-industrialsolar.de
 www.aeg-industrialsolar.de

1-Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25°C
 2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±5%
 3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power
 4-NMOT: Nominal operating temperature of module, Irradiance 800 W/m², Wind Speed 1m/s, Ambient Temperature 20°C, Air Mass AM=1.5
 5-(HE/GB) No less than 98% of the minimum *Peak Power at STC in the first year, power output decline no more than 0.55% per year thereafter. Full text of the Warranty Terms available at: www.aeg-industrialsolar.de
 6-Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (±0.079")
 Version 2021.08.V2.EN
 © Solar Solutions GmbH. Specifications in this datasheet are subject to change without notice.