AEG

AEG HIGH VOLTAGE BATTERY





AS-BBH1/HV / HIGH VOLTAGE BATTERY

PRODUCT SERIES

AEG HIGH VOLTAGE BATTERY

ELECTRICAL CHARACTERISTICS			
Model: AS-BBH1-xxx/HV		10000	15000
Battery type	Lithium LFP		
Nominal capacity	[kWh]	10	15
Usable capacity	[kWh]	9	13.5
Nominal voltage	[V]	268.8	384
Voltage range (usable)	[V]	235.2-294	336-420
Charge voltage	[V]	294	420
Discharge cut-off voltage	[V]	235.2	360
Charge / Discharge current (nominal)	[A]	20/20	20/20
Charge / Discharge current (max)	[A]	40/40	40/40
Depth of Discharge (DOD)	[%]	90	90

OPERATING CONDITIONS			
Operating temperature	[°C]	-10 to 50	
Operating temperature (recommended)	[°C]	15 to 30	
Storage temperature	[°C]	-30 to 60	
Humidity conditions	[%]	5 to 95	
Altitude	[m]	max. 2000	
Cooling method	Natura	Natural convection	




PRODUCT NAMECODE (PNC) AS-BBH1-10000/HV, AS-BBH1-15000/HV

PHYSICAL CHARACTERISTICS				
Model: AS-BBH1-xxx/HV		10000	15000	
Height	[mm]	971	1205	
Width	[mm]	654	654	
Depth	[mm]	227	227	
Weight	[kg]	105	143	
Installation	floor-sta	floor-stand		
Case	carbon o	carbon or white color		

WARRANTY ¹	
Product and performance	10-year standard warranty or 6000 cycles
	(whichever comes first)

RELIABILITY AND CERTIFICATION		
Certification	Cell: UL1642	
	Battery module: IEC 62619 & UL1973	
Hazardous materials classification	Class 9	
Transportation	UN 38.3	
Ingress protection rating	IP54	
System configuration	1 to 4 parallel	

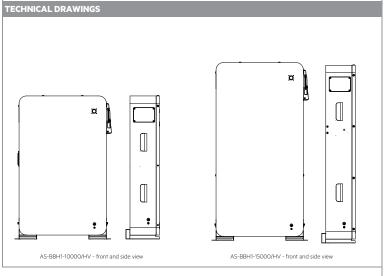

NOTES

1- For the full Warranty Terms please visit www.aeg-industrialsolar.de

Dimensions in the technical picture are expressed in mm with tolerance ± 2 mm (± 0.079 ")

© Solar Solutions Group. Version 2023.06.V1.EN Specifications in this datasheet are subject to change without notice.

AEG is a registered trademark used under license from AB Electrolux (publ).